

3/4" dia 36" long pickets with plastic inserts surface mounted onto wood top and bottom rails with #8 x 1 1/4" long screws.

**PICKETS**

- Cold Formed Steel Tubing Exterior Galvalume Coating
- Chromate Conversion Coating
- Electrostatically Applied
- Thermally Bonded Polyester Powder Coating
- Minimum Film Thickness 2.5mm

**POST & RAILS**

- Supplied by others

**FITTINGS**

- 36", 34", 32", 28", & 26" long pickets
- plastic inserts for top and bottom of pickets
- Product # SMDRA & SMSRA


**STANDARD COLOURS**

- High Gloss Black.

**NOTES:**

These rail pickets meet the load requirements of section 4.1.5.14 (2) of the 2012 Ontario Building Code for individual elements within a guard and may be installed in a railing system where post and rails meet the Code requirements to provide a guard rail or stair rail system.

(For details of acceptable railing systems under the 2012 Ontario Building Code, refer to the requirements of the Supplementary Guideline SB-7 of the Code).

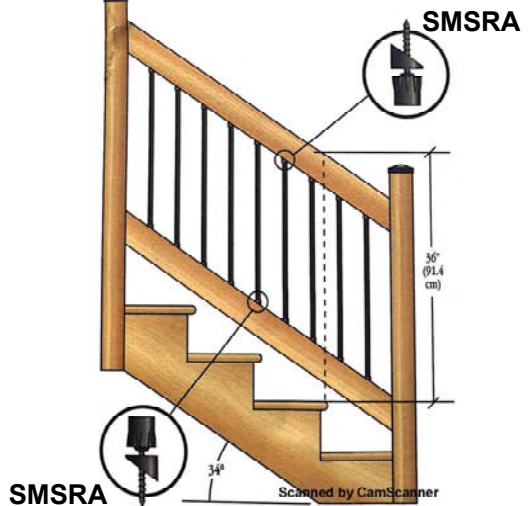

Reviewed for Nuvo Iron components only (Stamp valid for the current dated year and may not be copied without authorization from D, C & I)

**Design, Construction & Inspection,**

28 Cawthra Ave, Toronto, Ontario. M6N 5B3.

Phone: 647-887-6420. email: gary@dowman.net.